

MEA® DRAIN TOP 1000




Top 1000 CLIPFIX channel gratings

With non-bolted CLIPFIX channel gratings securement.
 Suitable for channel systems **MEADRAIN Supreme S 1000, EN 1000, SV 1000, Z 1000** and **MEADRAIN Solution LS 1000/60, LS 1000/80, SVF 1000, LZ 1000/60 and LZ 1000/80 and SVF 1000.**
 For channel units and catch basins. Total width of gratings 122mm.

Also available with Standard Locking or Stainless Steel Tamperproof Bolts

Slotted grating 10/90, loading class C250 with CLIPFIX

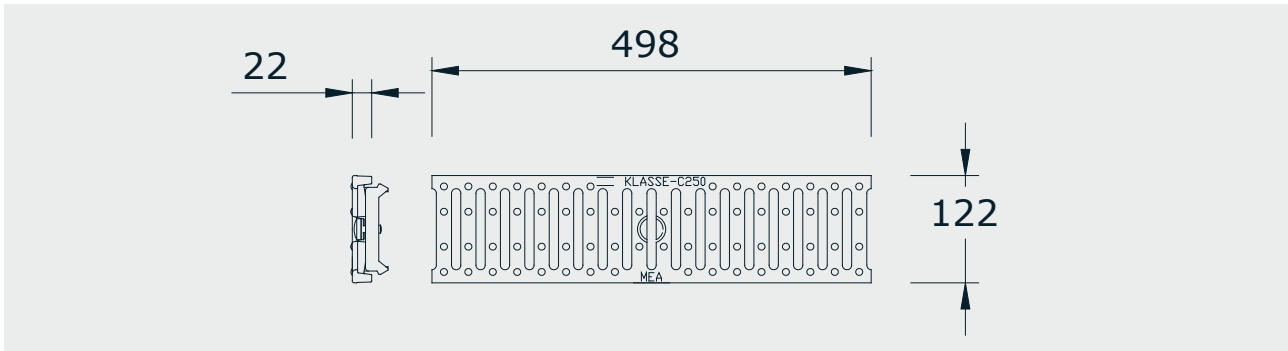

Loading class C250 according to EN 1433, ductile iron with CLIPFIX

| material-group | Product description | Material | Length mm | EDP-No. 010... | EAN-Code 4001990... | Inlet sect. area \varnothing cm ² /m | kg/unit | units/pallet |
|----------------|------------------------------------|--------------|-----------|----------------|---------------------|---------------------------------------------------|---------|--------------|
| MD | Ductile iron slotted grating 10/90 | Ductile iron | 500 | 152403 | 027967 | 350 | 3.30 | 350 |

Also available in Hot Dip Galvanized finish

This is how easy channel grating disassembly can be:

All you need are work gloves and the MEA® grate hook. With these, pull out the first channel grating in a channel run. You can now remove all the rest comfortably by hand.



Every reasonable effort has been taken to ensure the accuracy of this document. However we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free:877-385-5130
www.northstarindustries.ca