

# MEA® DRAIN TOP 1000

## ADA gratings



### Top 1000 ADA channel gratings

With non-bolted CLIPFIX channel grating securement. Suitable for systems **SV 1000** and **SVF 1000**.

With longitudinal fixation lugs. For channel units and catch basins. Width 122 mm.

The channel grating complies with **ADA** requirements (American Disabilities Act). The slots are placed perpendicular to the flow of traffic to be wheelchair and disability friendly. For channel gratings for cross drainage the slots are not greater than 13 mm (1/2 inch) wide and less than 40 mm long. Slip-resistant heights below 3 mm. Slip-resistant surface is ductile iron.


#### Loading class E600\*\* according to EN 1433 with CLIPFIX

Following grating, loading class E600\*\*, with longitudinal fixation lugs, only suitable for SV 1000 and SVF 1000.



material-group	Product description	Material	Length mm	EDP-No. 010...	EAN-Code 4001990...	Inlet sect. area Øcm <sup>2</sup> /m	kg/unit	units/pallet
MD	ADA longitudinal ductile iron grating 36/7.7	Ductile iron	500	152543	273937	380	4.25	204

\*\* From loading class D400 not suitable for cross drainage of high speed roads and motorways.

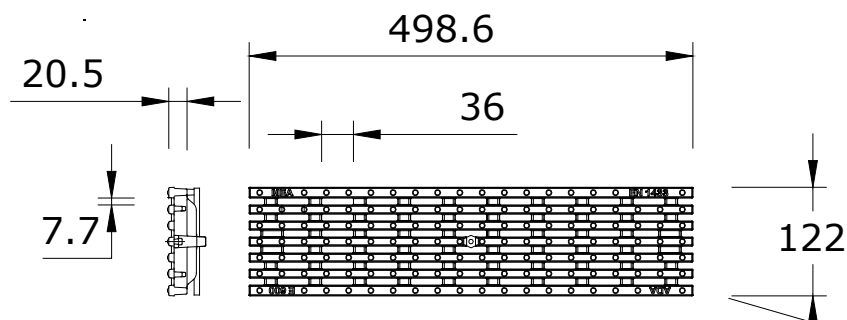

SV 1000 ADA longitudinal ductile iron grating 36/7.7 with CLIPFIX, loading class E600\*\*

Every reasonable effort has been taken to ensure the accuracy of this document. However we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130  
www.northstarindustries.ca