

MEA® DRAIN TOP 1000

ADA gratings



Top 1000 ADA channel gratings

With PROFIX non-bolted locking mechanism. Suitable for system **EN 1000**.


With longitudinal fixation lugs. For channel units and catch basin. Width 122 mm.

The channel grating complies with **ADA** requirements (American Disabilities Act). The slots are placed perpendicular to the flow of traffic to be wheelchair and disability friendly. Channel gratings for cross drainage the slots are not greater than 13 mm (1/2 inch) wide and less than 40 mm long. Slip-resistant heights below 3 mm. Slip-resistant surface is ductile iron.

EN 1000 ADA longitudinal ductile iron grating 36/7.7 with PROFIX, loading class E600**



| material-group | Product description | Material | Length mm | EDP-No. 010... | EAN-Code 4001990... | Inlet sect. area Øcm ² /m | kg/unit | units/pallet |
|----------------|--|--------------|-----------|----------------|---------------------|--------------------------------------|---------|--------------|
| MD | ADA longitudinal ductile iron grating 36/7.7 | Ductile iron | 500 | 152545 | 273944 | 380 | 4.25 | 204 |

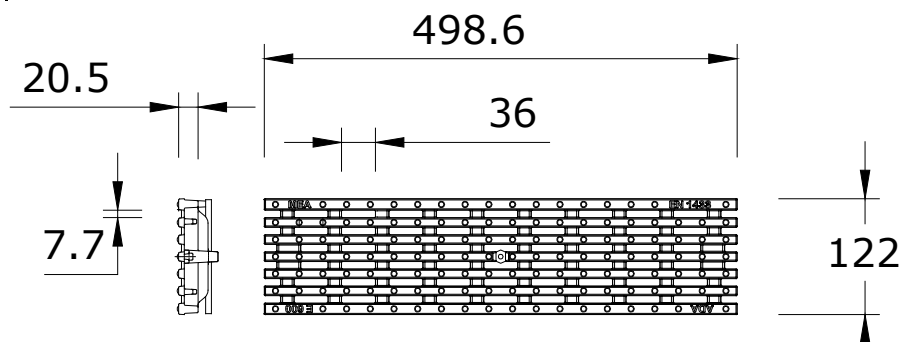

EN 1000 ADA longitudinal ductile iron grating 36/7.7 with PROFIX, loading class E600**

Every reasonable effort has been taken to ensure the accuracy of this document. However we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free:877-385-5130
www.northstarindustries.ca