

# MEA® DRAIN TOP 1000




## Top SV 1000 CLIPFIX channel gratings

With non-bolted CLIPFIX channel grating securement.

Only suitable for channel systems **MEADRAIN Supreme SV 1000** and **MEADRAIN Solution SVF 1000**. With longitudinal fixation lugs. For channel units and catch basins. Total width of gratings 122mm.

**Also available with Standard Locking or Stainless Steel Tamperproof Bolts**

**ADA longitudinal slotted grating 36/7.7, loading class E600\*\* with CLIPFIX**

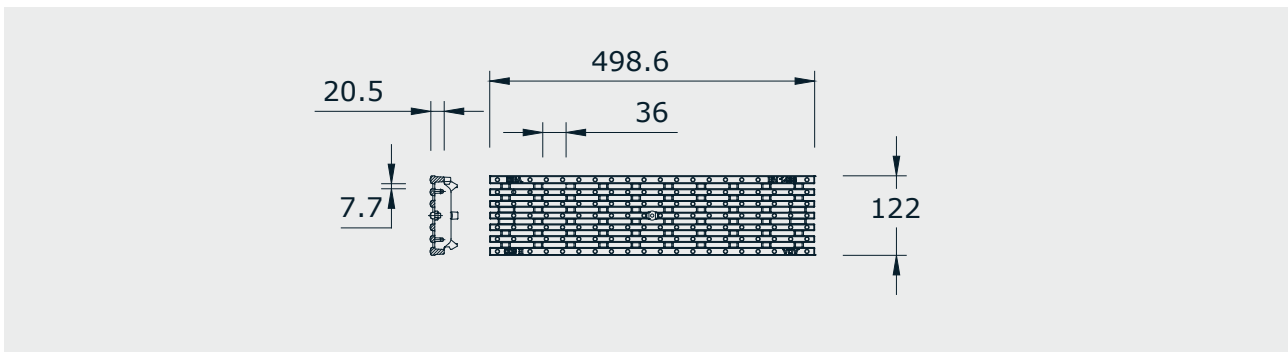

**Loading class E600\*\* to EN 1433, ductile iron with CLIPFIX**

material-group	Product description	Material	Length mm	EDP-No. 010...	EAN-Code 4001990...	Inlet sect. area $\varnothing$ cm <sup>2</sup> /m	kg/unit	units/pallet
MD	ADA longitudinal slotted grating 36/7.7 with longitudinal fixation lugs	Ductile iron	500	152543	273937	380	4.25	204

The channel grating complies with ADA requirements (Americans Disabilities Act). The slots are placed perpendicular to the flow of traffic so the grates are wheelchair and disability friendly. Slots width is not greater than 13 mm (1/2 inch) in cross direction and slot length is less than 40 mm. Slip-resistant heights are below 3 mm. Slip-resistant surface is made of ductile iron.

\*\* From loading class D400 not suitable for cross drainage of high speed roads and motorways.

**Also available in Hot Dip Galvanized finish**

**This is how easy channel grating disassembly can be:**

All you need are work gloves and the MEA® grate hook. With these, pull out the first channel grating in a channel run. You can now remove all the rest comfortably by hand.



*Every reasonable effort has been taken to ensure the accuracy of this document. However we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.*

Toll Free:877-385-5130  
www.northstarindustries.ca