


MEADRAIN® Top 3000

Technical data

Slotted, ductile iron grating, class C 250

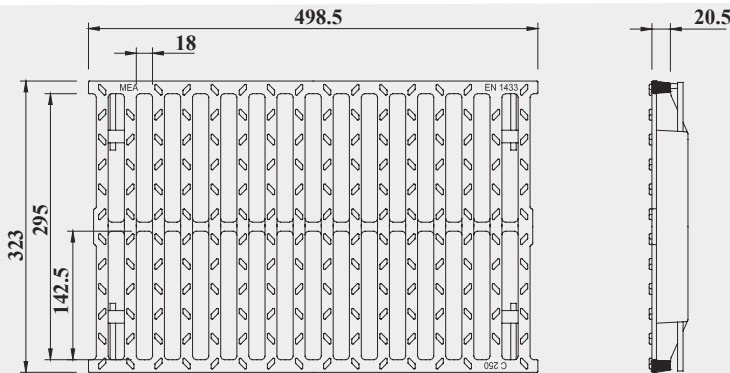

Description and sizes

- | | | | |
|-------------------------|-------------------------|--------------------|-----------------------|
| ◆ Type of grating: | slotted | ◆ Type of locking: | PROFIX |
| ◆ Material: | ductile iron | ◆ Loading class: | C 250 |
| ◆ EDP-number: | 010153585 | ◆ Testload | 25,000 kg / 55,000 lb |
| ◆ Length: | 500 mm | | |
| ◆ Width: | 323 mm | | |
| ◆ Width slots: | 18.0 mm/142.5 mm | | |
| ◆ Inlet sectional area: | 1640 cm ² /m | | |
| ◆ Weight: | 14.0 kg | | |

Also available in Hot Dip Galvanized finish

Also available in Galvanized or Stainless Steel Bolted or Tamperproof Locking

Every reasonable effort has been taken to ensure the accuracy of this document. However we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
www.northstarindustries.ca