Technical Data Sheet


ANRIN DRAIN Cover Gratings for KE-100 Series Slotted Galvanized Steel Grating with TwistLock Fastening System (Load Rating A15)



Toll Free: 877-385-5130

www.northstarindustries.ca

Grating Dimensions

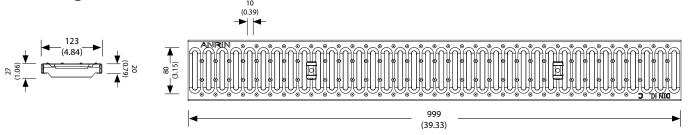

Slotted Galvanized Steel Grating

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm²/m (in²/ft)	Weight kg (lbs.)
Load class A15					
Slotted galvanized steel grating slot width = 10 mm (0.39 in)	01004200 01004220	1000 (39.37) 500 (19.69)	123 (4.84) 123 (4.84)	280 (13.23) 280 (13.23)	2.4 (5.29) 1.2 (4.53)

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).