


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-100 Series
 Slotted Stainless Steel Grating
 with TwistLock Fastening System (Load Rating A15)



Grating Dimensions

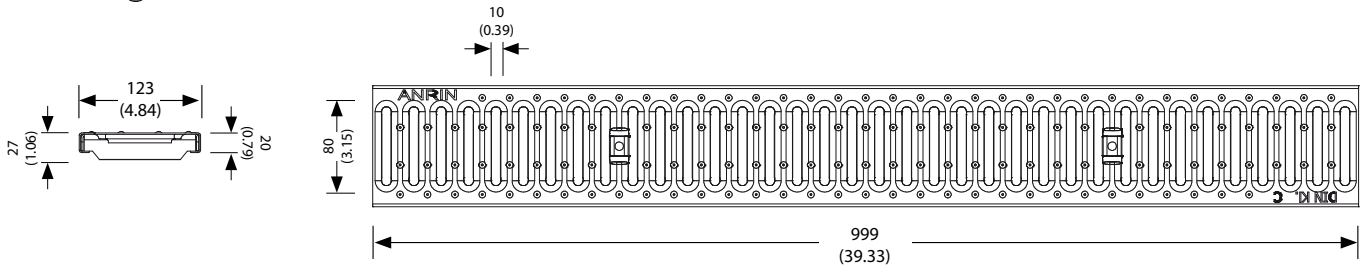

Slotted Stainless Steel Grating

| Designation | Article | Length mm (in) | Width mm (in) | Intake Area cm ² /m (in ² /ft) | Weight kg (lbs.) |
|---|----------|-------------------|------------------|---|---------------------|
| Load class A15 | | | | | |
| Slotted stainless steel grating slot width = 10 mm (0.39 in) | 01004300 | 1000 (39.37) | 123 (4.84) | 280 (13.23) | 2.4 (5.29) |
| | 01004320 | 500 (19.69) | 123 (4.84) | 280 (13.23) | 1.2 (4.53) |

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).