


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-100 Series
 Double Galvanized Slotted Steel Grating
 with TwistLock Fastening System (Load Rating C250)



Grating Dimensions

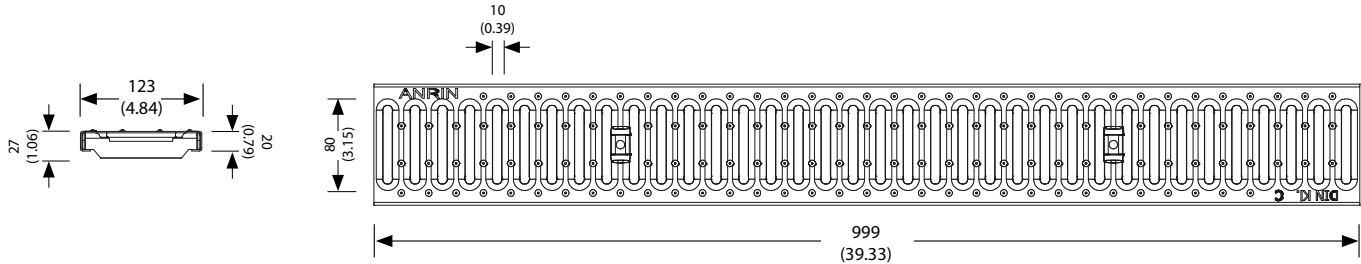

Double Slotted Galvanized Steel Grating

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Load class C250					
Double slotted galvanized steel grating slot width = 10 mm (0.39 in)	01004600	1000 (39.37)	123 (4.84)	280 (13.23)	5.0 (11.02)
	01004620	500 (19.69)	123 (4.84)	280 (13.23)	2.5 (5.51)

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
 www.northstarindustries.ca