


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-100 Series
 Double Slotted Stainless Steel Grating
 with TwistLock Fastening System (Load Rating C250)
 ADA Compliant



Grating Dimensions

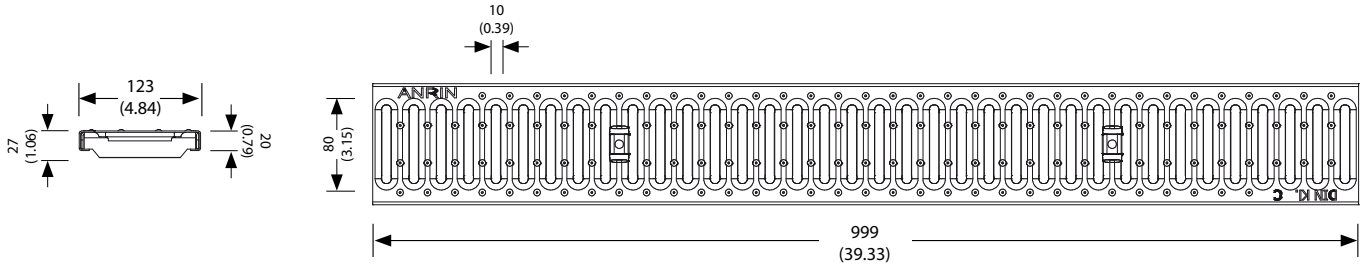

Double Slotted Stainless Steel Grating

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Load class C250					
Double slotted stainless steel grating slot width = 10 mm (0.39 in)	01004640	1000 (39.37)	123 (4.84)	280 (13.23)	5.0 (11.02)
	01004660	500 (19.69)	123 (4.84)	280 (13.23)	2.5 (5.51)

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).