Technical Data Sheet


ANRIN DRAIN Cover Gratings for KE-100 Series Perforated Galvanized Steel Grating with TwistLock Fastening System (Load Rating C250)



Toll Free: 877-385-5130

www.northstarindustries.ca

Grating Dimensions

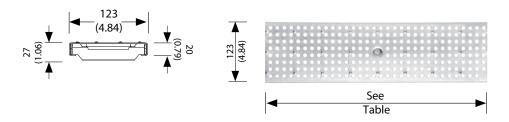

Perforated Stainless Steel Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm²/m (in²/ft)	Weight kg (lbs.)
Load class C250					
Perforated galvanized steel grating	01004700	1000 (39.37)	123 (4.84)	178 (8.41)	4.6 (10.14)
	01004720	500 (19.69)	123 (4.84)	178 (8.41)	2.3 (5.07)

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).