


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-100 Series
 Perforated Heel-Proof ADA Stainless Steel Grating
 with TwistLock Fastening System (Load Rating C250)



Grating Dimensions

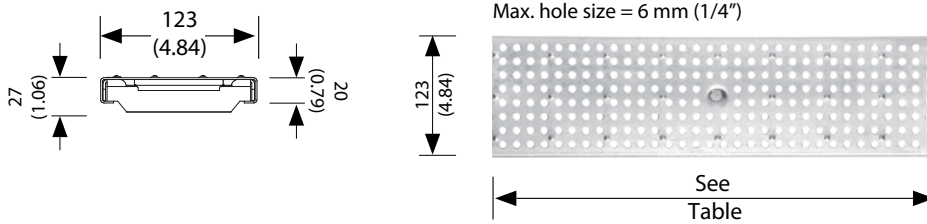

Perforated Stainless Steel Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Load class C250					
Perforated stainless steel grating	01004740	1000 (39.37)	123 (4.84)	178 (8.41)	4.6 (10.14)
	01004760	500 (19.69)	123 (4.84)	178 (8.41)	2.3 (5.07)

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).