


## Technical Data Sheet

ANRIN DRAIN Cover Grating for KE-100 Series  
Logitudinal-Bar, Ductile Iron ADA Grating (Load Class D400)



## Grating Dimensions

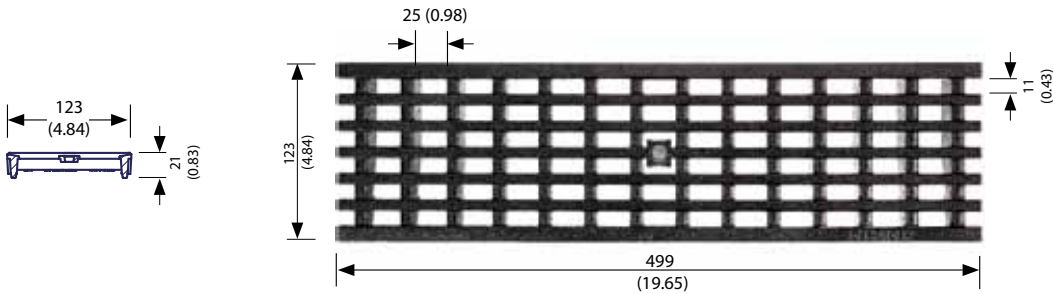

## Grating Specifications

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
Logitudinal-bar, ductile iron ADA grating (D400*)	01004970	500 (19.69)	123 (4.84)	420 (22.68)	4.1 (9.04)

\*Exception: Cross-road drainage of busy roads

## TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130  
www.northstarindustries.ca