


Technical Data Sheet

ANRIN DRAIN Cover Grating for KE-100 Series
 Slotted Grating, HEELGUARD, ADA, Ductile-Iron



Grating Dimensions

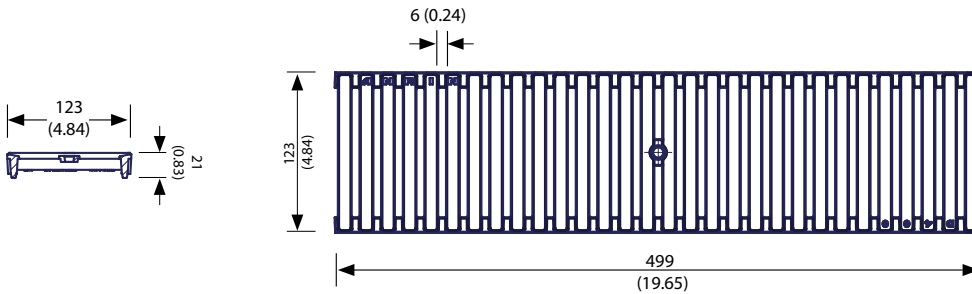

Grating Specifications

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Slotted grating, HEELGUARD Ductile-iron, SW 6 mm (D400*)	01004980	500 (19.69)	123 (4.84)	420 (22.68)	4.1 (9.04)

*Exception: Cross-road drainage of busy roads

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
www.northstarindustries.ca