


## Technical Data Sheet

ANRIN DRAIN Cover Grating for KE-100 Series  
 Slotted Ductile Iron Grating with OvalGrip Design (Load Class E600)



### Grating Dimensions

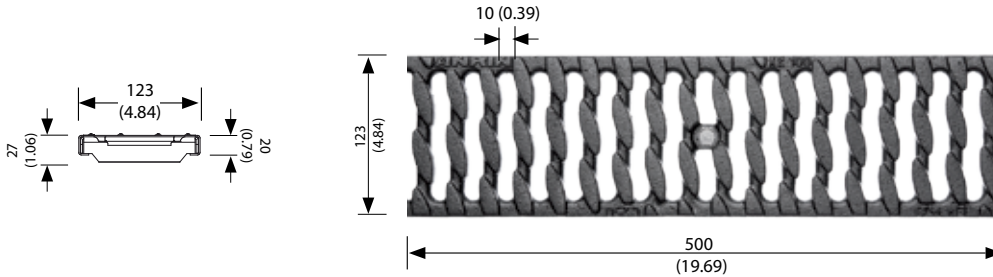

### Grating Specifications

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
Slotted Ductile Iron Grating with OvalGrip Design (E600*)	01005120	500 (19.69)	123 (4.84)	420 (22.68)	5.0 (11.02)

\*Exception: Cross-road drainage of busy roads

### TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130  
[www.northstarindustries.ca](http://www.northstarindustries.ca)