


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200
Mesh Grating, Galvanized Steel
with SnapLock Fastening (Load Class D400)



Grating Dimensions

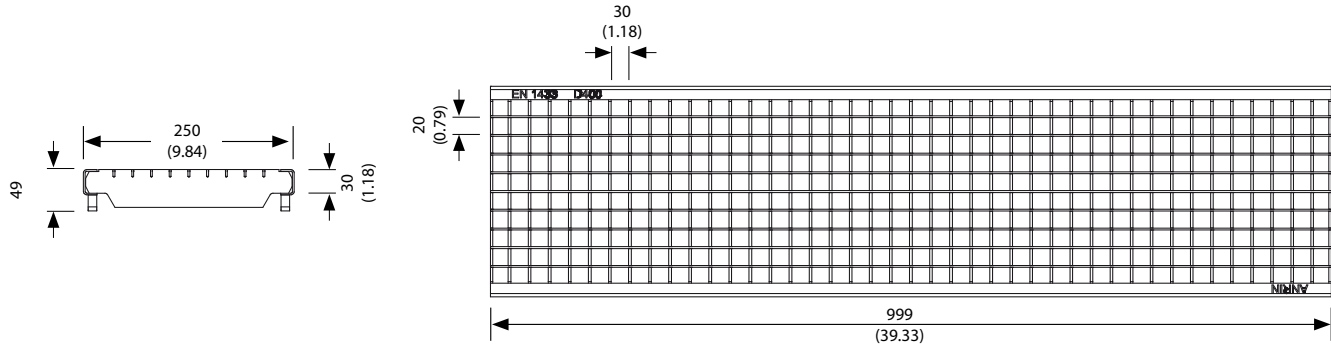

Mesh Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Mesh grating	01125300	1000 (39.37)	250 (9.84)	1566 (73.96)	13.8 (30.44)
galvanized steel, MW 30 x 20 mm (D400*)	01125320	500 (19.69)	250 (9.84)	1566 (73.96)	6.8 (14.99)

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).