


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-150 Series
 Mesh Grating, Stainless Steel
 with SnapLock Fastening (Load Class D400)



Grating Dimensions

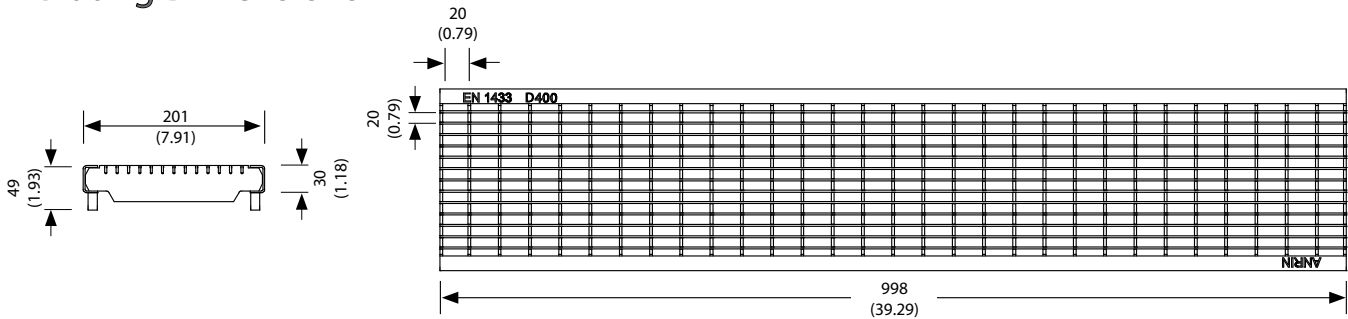

Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Mesh grating, stainless steel	01125400	1000 (39.37)	200 (7.87)	1170 (55.26)	9.5 (20.94)
MW 20 x 20 mm (D400)	01125420	500 (19.69)	200 (7.87)	1170 (55.26)	4.9 (10.80)

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
www.northstarindustries.ca