


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200
 Mesh Grating, Stainless Steel
 with SnapLock Fastening (Load Class C250)



Grating Dimensions

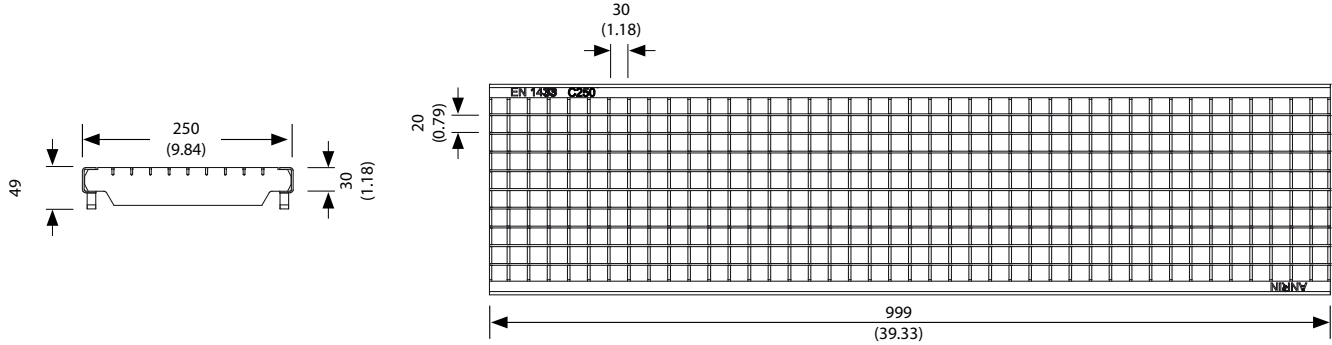

Mesh Grating Parts List

| Designation | Article | Length mm (in) | Width mm (in) | Inlet Ø cm ² /m (in ² /ft) | Weight kg (lbs.) |
|---------------------------------------|----------|-------------------|------------------|---|---------------------|
| Mesh grating | 01124540 | 1000 (39.37) | 250 (9.84) | 1640 (77.46) | 9.7 (21.38) |
| stainless steel, MW 30 x 20 mm (C250) | 01124560 | 500 (19.69) | 250 (9.84) | 1640 (77.46) | 5.1 (11.24) |

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
www.northstarindustries.ca