


## Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200  
 Slotted Grating, Ductile-Iron, OvalGrip Design  
 with SnapLock Fastening (Load Class D400)



## Dimensions

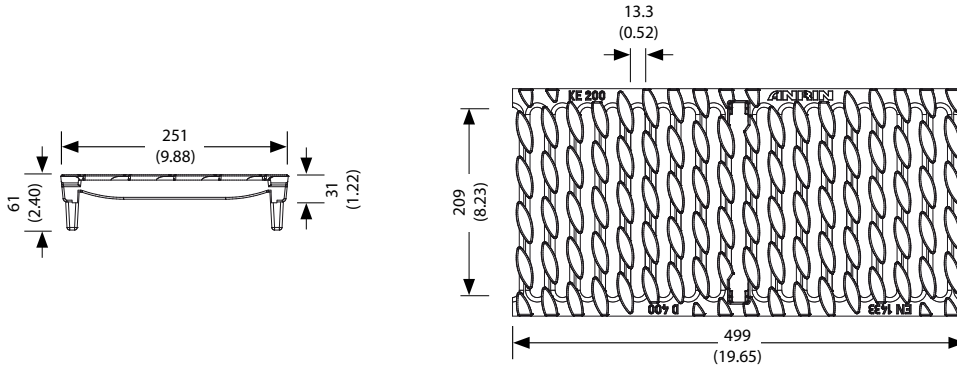

## Slotted Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
Slotted grating with OvalGrip Design Ductile-Iron, SW=12mm (D400*)	01125220	500 (19.69)	250 (9.84)	990 (46.76)	11.5 (25.35)

\* Exception: Cross-road drainage of busy roads

## SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130  
[www.northstarindustries.ca](http://www.northstarindustries.ca)